

10 - 1386

**An Evaluation of the May 2009 “Click It or Ticket”  
Safety Belt Mobilization Campaign in Minnesota**

**David W. Eby  
Jonathon M. Vivoda  
John Cavanagh**

**RECEIVED**

APR 30 2010

LEGISLATIVE REFERENCE LIBRARY  
STATE OFFICE BUILDING  
ST. PAUL, MN 55155

July, 2009

Consultant's Report

# TABLE OF CONTENTS

INTRODUCTION .....	2
METHODS.....	4
Sample Design .....	4
Data Collection.....	10
Data Processing and Estimation Procedures.....	12
RESULTS.....	16
Overall Safety Belt Use.....	16
Safety Belt Use by Subcategory (Post, Full Survey Only).....	17
DISCUSSION .....	23
REFERENCES .....	25
APPENDIX A: PDA Data Collection Details .....	27
APPENDIX B: Site Listing .....	33

## INTRODUCTION

According to a recent report from the National Highway Traffic Safety Administration (NHTSA, 2008) safety belt use in the United States reached a record high of 83 percent in 2008. A major component of this success is NHTSA's effort to increase use of belts through the annual *Click it or Ticket Safety Belt Mobilization* campaigns. Each year NHTSA supports the campaign by developing a schedule, communication plan, and advertisement materials. NHTSA also provides funding directly to states to help them fund local advertisement, overtime enforcement, and evaluation activities. The *Click it or Ticket* campaign is based on the idea of increasing the perceived risk of receiving a citation for belt nonuse. The change in perceived risk is achieved through the combination of advertisements notifying the public that police will be increasing their efforts to cite belt law violators, and high-visibility belt enforcement. Research has shown that increasing the perceived certainty of a safety belt citation and the resulting fines can convince people to buckle up. In fact, previous implementations of this program have been shown to increase statewide safety belt use (Solomon, Chaudhary, & Cosgrove, 2003; Solomon, Ulmer, & Preusser, 2002). The 2009 *Click It or Ticket National Mobilization* was targeted at men aged 18-34 and used the tagline: "Day or Night – Click it or Ticket."

So that Minnesota can further its efforts to reduce traffic-crash-related injuries and fatalities, the state continues to participate in the nationwide safety belt mobilization campaigns. Minnesota was quite active during the *May 2009 Safe and Sober--Click It or Ticket Mobilization* campaign. According to the Minnesota Office of Traffic Safety (2009), the Minnesota campaign utilized around 400 police agencies and encouraged agencies to enforce belt and child passenger safety laws during both daytime and nighttime hours. The Minnesota campaign took place from May 18-31. Enforcement activity levels during the campaign have not yet been released.

The year 2009 has also been a highly productive legislative year for Minnesota in terms of occupant protection. After many years of effort by several organizations in Minnesota, including the Minnesota Safety Council, Minnesota became the 29<sup>th</sup> state to upgrade to primary enforcement of safety belt use, effective June 9, 2009. According to

Minnesota's law, all vehicle occupants, regardless of age or seating position, must be properly restrained. Cost for violating the law ranges from \$25-\$100.

In order for Minnesota to track the effectiveness of these laws and efforts, EPIC•MRA was selected to: (1) assist in data collection efforts for two survey waves (a mini "PRE" and a full "POST" survey); (2) conduct data analysis on both surveys; and (3) report the results of the surveys. This report documents the survey design, methods, data analysis, and results.

# METHODS

## Sample Design

The goal of this sample design was to select observation sites that accurately represent front-outboard vehicle occupants in eligible commercial and noncommercial vehicles (i.e., passenger cars, vans/minivans, sport-utility vehicles, and pickup trucks) in Minnesota, while following federal guidelines for safety belt survey design (NHTSA, 1992, 1998). An ideal sample minimizes total survey error while providing sites that can be surveyed efficiently and economically. To achieve this goal, NHTSA guidelines allow states to omit from their sample space the lowest population counties, provided these counties collectively account for 15 percent or less of the state's total population. Therefore, all 87 Minnesota counties were rank ordered by population (US Census Bureau, 2003) and the low population counties were eliminated from the sample space. This step reduced the sample space to 37 counties.

These 37 counties were then separated into four strata. The strata were constructed by obtaining historical belt use rates and vehicle miles of travel (VMT) for each county. Historical belt use rates were determined by examining results from three previous statewide safety belt surveys conducted in Minnesota. Since no historical data were available for 22 of the counties, belt use rates for these counties were estimated using multiple regression based on educational attainment for the other 15 counties ( $r^2 = .35$ ; US Census Bureau, 2003).<sup>1</sup> This factor has been shown previously to correlate positively with belt use. Hennepin County was chosen as a separate stratum because of its disproportionately high VMT. Three other strata were constructed by rank ordering each county by historical belt use rates and then adjusting the stratum boundaries until the total VMT was roughly equal within each stratum. The stratum boundaries were high belt use, medium belt use, low belt use, and Hennepin County. Hennepin County VMT was slightly lower than the collective VMTs in the other strata (94%). Stratum boundaries for the sample space are shown in Table 1.

---

<sup>1</sup> Educational attainment was defined as the proportion of population in the county over 25 years of age with a bachelor degree.

To achieve the NHTSA required precision of less than 5 percent relative error, the minimum number of observation sites for the survey was determined based on within- and between-county variances from previous belt use surveys and on an estimated 50 vehicles per observation period in the current survey. This number was then increased (N = 240) to get an adequate representation of belt use for each day of the week and for all daylight hours.

Because total VMT within each stratum was roughly equal, observation sites were evenly divided among the strata (60 each). In addition, since an estimated 29 percent of all traffic in Minnesota occurs on limited-access roadways (Federal Highway Administration, 2002), each stratum was further divided into two strata, one of which contained 17 limited access sites (exit ramps) to represent the 29% of VMT on limited access roadways and one that contained 43 roadway intersections. Thus, the sample design had a total of 8 strata.


<b>Table 1: Listing of the Counties Within Each Stratum</b>	
<b>Stratum</b>	<b>Counties</b>
<b>High Belt Use</b> Stratum 1: intersections Stratum 5: exit ramps	Carver, Dakota, Olmsted, Ramsey, Wright
<b>Hennepin</b> Stratum 2: intersections Stratum 6: exit ramps	Hennepin
<b>Medium Belt Use</b> Stratum 3: intersections Stratum 7: exit ramps	Beltrami, Blue Earth, Clay, Crow Wing, Freeborn, Goodhue, Kandiyohi, Nicollet, Rice, Scott, Sherburne, St. Louis, Steele, Washington
<b>Low Belt Use</b> Stratum 4: intersections Stratum 8: exit ramps	Anoka, Becker, Benton, Brown, Carlton, Cass, Chisago, Douglas, Isanti, Itasca, McLeod, Morrison, Mower, Otter Tail, Polk, Stearns, Winona

Within each intersection stratum, observation sites were randomly assigned to a location using a method that ensured each intersection within a stratum an equal probability of selection. Detailed, equal-scale road maps for each county within the sample space were obtained and a grid pattern was overlaid on the maps. The lines of the grid were separated by 1/4 inch, thus creating grid squares that were about 3/4 of a mile per side. The grid patterns were created by printing a grid design onto transparencies and uniquely identifying each grid square by two numbers, a horizontal (x) coordinate and a vertical (y) coordinate. Additional grid transparencies were printed until enough were available to cover all counties within the stratum. Each transparency was numbered to allow for a simpler grid square numbering scheme.

The 43 local intersection sites were chosen by first randomly selecting a transparency number and then a random x and a random y coordinate within the identified transparency grid sheet. If a single intersection was contained within the square, that intersection was chosen as an observation site. If the square did not fall within the stratum, or there was no intersection within the square, then a new transparency number and x, y coordinate were randomly selected. If more than one intersection was within the grid square, the grid square was subdivided into four equal sections and a random number between 1 and 4 was selected until one of the intersections was chosen. Thus, each intersection within the stratum had an equal probability of selection.

Once a site was chosen, the following procedure was used to determine the particular street and direction of traffic flow that would be observed. For each intersection, all possible combinations of street and traffic flow were determined. From this set of observer locations, one location was randomly selected with a probability equal to 1/number of locations. For example, if the intersection, was a "+" intersection, as shown in Figure 1, there would then be four possible combinations of street and direction of traffic flow to be observed (observers watched traffic only on the side of the street on which they were standing). In Figure 1, observer location number one indicates that the observer would watch southbound traffic and stand next to Main Street. For observer location number two, the observer would watch eastbound traffic and stand next to Second Street, and so on. In this example, a random number

between 1 and 4 would be selected to determine the observer location for this specific site. The probability of selecting a given standing location is dependent upon the type of intersection. Four-legged intersections like that shown in Figure 1 have four possible observer locations, while three-legged intersections like "T" and "Y" intersections have only three possible observer locations. The effect of this slight difference in probability accounts for .01 percent or less of the standard error in the belt use estimate.

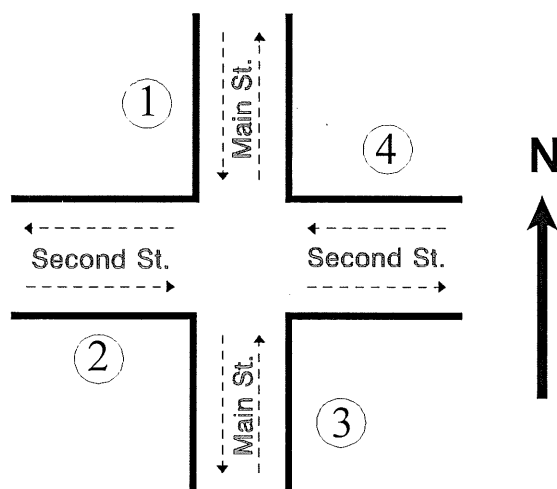

**Figure 1: An Example "+" Intersection Showing 4 Possible Observer Locations.**

For each primary intersection site, an alternate site was also selected. The alternate sites were chosen within a five square mile area around the grid square containing the original intersection. This was achieved by randomly picking an x, y grid coordinate within an alternate site grid transparency consisting of 7 squares horizontally by 7 squares vertically, centered around the primary site. Coordinates were selected until a grid square containing an intersection was found. The observer location at the alternate intersection was determined in the same way as at the primary site.<sup>1</sup>

The 17 freeway exit ramp sites for the exit ramp strata were also selected using a method that allowed equal probability of selection for each exit ramp within the stratum.<sup>2</sup> This was done by enumerating all of the exit ramps within a stratum and randomly

<sup>1</sup> For those interested in designing a safety belt survey for their county or region, a guidebook and software for selecting and surveying sites for safety belt use is available (Eby, 2000) by contacting UMTRI-SBA, 2901 Baxter Rd., Ann Arbor, MI 48109-2150.

<sup>2</sup> An exit ramp is defined here as egress from a limited-access freeway, irrespective of the direction of travel. Thus, on a north-south freeway corridor, the north and south bound exit ramps at a particular cross street are considered a single exit ramp location.



selecting, without replacement, 17 numbers between 1 and the number of exit ramps in the stratum. For example, in the low belt use stratum there were a total of 75 exit ramps; therefore a random number between 1 and 75 was generated. This number corresponded to a specific exit ramp within the stratum. To select the next exit ramp, another random number between 1 and 75 was selected with the restriction that no previously selected numbers could be chosen. Once the exit ramps were determined, the observer location for the actual observation was determined by enumerating all possible combinations of direction of traffic flow and sides of the ramp on which to stand. As in the determination of the observer locations at the roadway intersections, the possibilities were then randomly sampled with equal probability. The alternate exit ramp sites were selected by taking the first interchange encountered after randomly selecting a direction of travel along the freeway from the primary site. If this alternate site was outside the county, or if it was already selected as a primary site, then the other direction of travel along the freeway was used.

After all sites and standing locations were randomly selected, all intersection and exit ramp sites were visited by a researcher prior to the beginning of data collection to determine their usability. If an intersection site had no traffic control device on the selected direction of travel, but had traffic control on the intersecting street, the researcher randomly picked a new standing location using a coin flip. If an exit ramp site had no traffic control on the selected direction of travel, the researcher randomly picked a travel direction and lane that had such a device.

The day of week and time of day for site observations were quasi-randomly assigned to sites in such a way that all days of the week and all daylight hours (7:00 am - 6:00 pm) had essentially equal probability of selection. The sites were observed using a clustering procedure. That is, sites that were located spatially adjacent to each other were considered to be a cluster. Within each cluster, a shortest route between all of the sites was decided (essentially a loop) and each site was numbered. An observer watched traffic at all sites in the cluster during a single day. The day in which the cluster was to be observed was randomly determined. After taking into consideration the time required to finish all sites before dark, a random starting time for the day was selected. In addition, a random number between one and the number

of sites in the cluster was selected. This number determined the site within the cluster where the first observation would take place. The observer then visited sites following a clockwise or counter-clockwise loop. The direction of the loop was determined by the project manager prior to sending the observers into the field. Because of various scheduling limitations (e.g., observer availability, number of hours worked per week) certain days and/or times were selected that could not be observed. When this occurred, a new day and/or time was randomly selected until a usable one was found. The important issue about the randomization is that the day and time assignments for observations at the sites were not correlated with belt use at a site. This quasi-random method is random with respect to this issue.

The observation interval was a constant duration (50 minutes) for each site. However, since all vehicles passing an observer could not be surveyed, a vehicle count of all eligible vehicles (i.e., passenger cars, vans/minivans, sport-utility vehicles, and pickup trucks) on the traffic leg under observation was conducted for a set duration (5 minutes) immediately prior to and immediately following the observation period (10 minutes total). These counts were used to estimate the number of possible observations so that sites could be weighted by traffic volume.

### *Mini-Survey Design*

In order to obtain a statewide estimate of safety belt use with the least amount of cost, Minnesota chose to conduct a "mini survey" during the pre-mobilization period. The goal of the mini survey was to determine a valid statewide safety belt use rate following the sampling procedures, stratification, and methods established for the full survey. Toward this end, we randomly selected 84 sites from the full survey. The sites were selected with roughly the same proportions as the full survey for intersections and exit ramps. Scheduling of sites was completed using a new clustering and randomization of days and times. Thus, even though all 84 sites in the mini survey are found in the full survey, data are collected at them during different times of day and days of week. Analyses were conducted using the same methods and equations as used in the full survey.

## **Data Collection**

Data collection for the survey involved direct observation of shoulder belt use, estimated age, and sex. Trained field staff observed shoulder belt use of drivers and front-right passengers traveling in passenger cars, sport-utility vehicles, vans/minivans, and pickup trucks during daylight hours from April 26--May 7 for the mini (PRE) survey and June 5-18 for the full (POST) survey. Thus, the POST survey was conducted at the same time Minnesota upgraded to primary enforcement. Observations of safety belt use, sex, age, vehicle type, and vehicle purpose (commercial or noncommercial) were conducted when a vehicle came to a stop at a traffic light or a stop sign. Vehicles were included without regard to the state in which the vehicle was registered.

### *Data Collection Forms*

Data were collected using personal digital assistants (PDAs). For a more detailed description of the PDA data collection process, see Appendix A. To begin, an electronic form was developed for data collection containing: a site description section and a safety belt observation section. For each site surveyed, separate electronic copies of the form were created in advance. The site description form section allowed observers to provide descriptive information including the site location, site type (freeway exit ramp or intersection), site choice (primary or alternate), observer number, date, day of week, time of day, weather, and a count of eligible vehicles traveling on the proper traffic leg. A place on the form was also furnished for observers to electronically sketch the intersection and to identify observation location. Finally, a comments section was available to identify landmarks that might be helpful in characterizing the site (e.g., school, shopping mall) and to discuss problems or issues relevant to the site or study.

The safety belt observation section of the form was used to record safety belt use, passenger information, and vehicle information. For each vehicle surveyed, shoulder belt use, sex, and estimated age of the driver and the front-outboard passenger were recorded along with vehicle type. Children riding in child restraint devices (CRDs) were recorded but not included in any part of the analysis. Occupants observed with their shoulder belt worn under the arm or behind the back were noted but considered belted in the analysis. The observer also recorded whether the vehicle was commercial or noncommercial. A commercial vehicle is defined as a vehicle that is

used for business purposes and may or may not contain company logos. This classification includes vehicles marked with commercial lettering or logos, or vehicles with ladders or other tools on them.

### *Procedures at Each Site*

All sites in the sample were visited by one observer for a period of one hour. Upon arriving at a site, the observer determined whether observations were possible at the site. If observations were not possible (e.g., due to construction), the observer proceeded to the alternate site. Otherwise, the observer completed the site description form and then moved to their observation position near the traffic control device. Observers were instructed to observe only vehicles in the lane immediately adjacent to the curb, regardless of the number of lanes present.

At each site, observers conducted a 5-minute count of all eligible vehicles in the designated traffic leg before beginning safety belt observations. Observations began immediately after completion of the count and continued for 50 minutes. During the observation period, observers recorded data for as many eligible vehicles as they could observe. If traffic flow was heavy, observers were instructed to record data for the first eligible vehicle they saw, and then look up and record data for the next eligible vehicle they saw, continuing this process for the remainder of the observation period. At the end of the observation period, a second 5-minute vehicle count was conducted.

### *Observer Training*

Prior to data collection, members of the Minnesota Department of Public Safety, Office of Traffic Safety (OTS) staff were trained on field data collection procedures. The training of OTS staff included both classroom review of data collection procedures and practice field observations. Field observers were then hired and trained by OTS staff on the proper procedures for data collection. Each observer received a training manual containing detailed information on field procedures for observations, data collection forms, and administrative policies and procedures. A site schedule identifying the location, date, time, and traffic leg to be observed for each site was included in the manual (see Appendix B for a listing of the sites). During data collection, observers were spot checked in the field by a field supervisor to ensure adherence to study

protocols.

### **Data Processing and Estimation Procedures**

The safety belt data were entered into PDAs directly, so no data entry was required. For each site, computer analysis programs determined the number of observed vehicles, belted and unbelted drivers, and belted and unbelted passengers. Separate counts were made for each independent variable in the survey (i.e., site type, time of day, day of week, weather, sex, age, seating position, and vehicle type). This information was combined with the site information to create a file used for generating study results.

As mentioned earlier, our goal in this safety belt survey was to estimate belt use for the state of Minnesota based on VMT. As also discussed, not all eligible vehicles passing the observer could be included in the survey. To correct for this limitation, the vehicle count information was used to weight the observed traffic volumes so that an estimate of traffic volume at the site could be derived.

This weighting was done by first adding each of the two 5-minute counts and then multiplying this number by five so that it would represent a 50-minute duration. The resulting number was the estimated number of vehicles passing through the site if all eligible vehicles had been included in the survey during the observation period at that site. The estimated count for each site is divided by the actual number of vehicles observed there to obtain a volume weighting factor for that site. These weights are then applied to the number of actual vehicles of each type observed at each site to yield the weighted N for the total number of drivers and passengers, and total number of belted drivers and passengers for each vehicle type. All analyses reported are based upon the weighted values.

#### *Estimation of Use Rates*

The overall safety belt use rate for Minnesota was calculated utilizing the following procedure. The safety belt use rate for each stratum was calculated using the following formula:

$$R_s = \frac{\sum \frac{est_i}{obs_i} belted_i}{\sum \frac{est_i}{obs_i} occs_i}$$

Where  $R_s$  is the use rate for a stratum,  $i$  is a site in the stratum,  $est_i$  is the estimated number of possible observations had every eligible vehicle been recorded (based on the vehicle counts),  $obs_i$  is the actual number of people observed,  $belte d_i$  is the number of people observed using a safety belt, and  $occs_i$  is the number of occupants.

Because the number of intersections among the first four strata and the number of exit ramps among the last four strata differed, the probability of an intersection or exit ramp being randomly selected differed between strata. Therefore, we painstakingly counted all intersections in the first four strata and all exit ramps in the last four strata and used these counts to weight use rates when combining them. The first four strata (intersections) were combined using the following formula:

$$R_i = \frac{\frac{4 N_1}{N_{all}} R_1 + \frac{4 N_2}{N_{all}} R_2 + \frac{4 N_3}{N_{all}} R_3 + \frac{4 N_4}{N_{all}} R_4}{\frac{4 N_1}{N_{all}} + \frac{4 N_2}{N_{all}} + \frac{4 N_3}{N_{all}} + \frac{4 N_4}{N_{all}}}$$

$$R_i = \frac{N_1 R_1 + N_2 R_2 + N_3 R_3 + N_4 R_4}{N_1 + N_2 + N_3 + N_4}$$

where  $R_i$  is the combined use rate for the first four strata (intersections),  $N_1$  is the total number of intersections in stratum 1 and so on, and  $N_{all}$  is the total number of intersections among all four strata. The use rate for the exit ramp strata (strata 5-8) was calculated using the following formula:

$$R_e = \frac{\frac{4 N_5}{N_{all}} R_5 + \frac{4 N_6}{N_{all}} R_6 + \frac{4 N_7}{N_{all}} R_7 + \frac{4 N_8}{N_{all}} R_8}{\frac{4 N_5}{N_{all}} + \frac{4 N_6}{N_{all}} + \frac{4 N_7}{N_{all}} + \frac{4 N_8}{N_{all}}}$$

$$R_e = \frac{N_5 R_5 + N_6 R_6 + N_7 R_7 + N_8 R_8}{N_5 + N_6 + N_7 + N_8}$$

where  $R_e$  is the combined use rate for strata 5-8 (exit ramps),  $N_5$  is the total number of exit ramps in stratum 5 and so on, and  $N_{all}$  is the total number of exit ramps among all four strata.

Because only statewide VMT for limited access roadways was available and because only 29 percent of Minnesota travel is on limited access roadways, the

statewide safety belt rate was determined weighting  $R_e$  and  $R_i$  by their VMT using the following equation:

$$R_{MN} = \frac{VMT_i R_i + VMT_e R_e}{VMT_i + VMT_e}$$

### Estimation of Variance

The variances for the belt use estimates for each strata were calculated using an equation derived from Cochran's (1977) equation 11.30 from section 11.8:

$$\text{var}_{(n)} \approx \frac{n}{n-1} \sum_i \left( \frac{g_i}{\sum g_k} \right)^2 (r_i - r)^2 + \frac{n}{N} \sum_i \left( \frac{g_i}{\sum g_k} \right)^2 \frac{s_i^2}{g_i}$$

where  $\text{var}(r_i)$  equals the variance within a stratum,  $n$  is the number of observed intersections,  $g_i$  is the weighted number of vehicle occupants at intersection  $i$ ,  $g_k$  is the total weighted number of occupants at all sites within the stratum,  $r_i$  is the weighted belt use rate at intersection  $i$ ,  $r$  is the stratum belt use rate,  $N$  is the total number of intersections within a stratum, and  $s_i = r_i(1-r_i)$ . In the actual calculation of the stratum variances, the second term of this equation was negligible and was dropped in the variance calculations as is common practice.

Again because the number of intersections and exit ramps differed among the strata, when the variances were combined, they were weighted by the number of intersection/exit ramps within each strata. The variances for the first four (intersection) strata were combined using the following formula:

$$\text{var}(R_i) = \left( \frac{N_1}{N_{all}} \right)^2 \text{var}(R_1) + \left( \frac{N_2}{N_{all}} \right)^2 \text{var}(R_2) + \left( \frac{N_3}{N_{all}} \right)^2 \text{var}(R_3) + \left( \frac{N_4}{N_{all}} \right)^2 \text{var}(R_4)$$

The variance for the exit ramp strata were combined using the following formula:

$$\text{var}(R_e) = \left( \frac{N_5}{N_{all}} \right)^2 \text{var}(R_5) + \left( \frac{N_6}{N_{all}} \right)^2 \text{var}(R_6) + \left( \frac{N_7}{N_{all}} \right)^2 \text{var}(R_7) + \left( \frac{N_8}{N_{all}} \right)^2 \text{var}(R_8)$$

The overall variance was determined by weighting the intersection and exit ramp variances relative to the statewide VMT for these types of roadways using the following equation:

$$\text{var}(R) = \frac{(VMT_i)^2 \text{var}(R_i) + (VMT_e)^2 \text{var}(R_e)}{(VMT_i + VMT_e)^2}$$

The 95 percent confidence band was calculated using the formula:

$$95\% \text{ConfidenceBand} = R \pm 1.96 \sqrt{\text{var}(R)}$$

Finally, the relative error or precision of the estimate was computed using the formula:

$$\text{RelativeError} = \frac{SE}{R}$$

where SE is the standard error. The federal guidelines (NHTSA, 1992, 1998) stipulate that the relative error of the belt use estimate must be under 5 percent.



## RESULTS

As discussed previously, two surveys were conducted for this evaluation: a mini survey conducted prior to the mobilization campaign (PRE) and a full survey conducted after the campaign (POST). Both surveys report statewide safety belt use for four vehicle types combined (passenger cars, vans/minivans, sport-utility vehicles, and pickup trucks), in addition to reporting use rates for occupants in each vehicle type separately. Following NHTSA (1998) guidelines, these surveys included commercial vehicles. Thus, all rates shown in this report include occupants from both commercial and noncommercial vehicles. Because the mini survey is limited in scope, reliable estimates of safety belt use are only possible for overall and roadway type. Only these variables are compared between surveys. Belt use estimates for additional variables in the full survey are also reported.

### Overall Safety Belt Use

Table 2 shows the estimated safety belt use rate in Minnesota for all front-outboard occupants traveling in passenger cars, sport-utility vehicles, vans/minivans, and pickup trucks in the front-outboard positions in Minnesota during the two survey periods. The "±" value following the use rates indicate a 95 percent confidence interval around the percentage. As shown in this table, the statewide safety belt use rate prior to the *Click it or Ticket* campaign was  $90.4 \pm 1.8$  percent and  $86.5 \pm 1.7$  percent afterwards. Because the 95 percent confidence intervals for the two statewide estimates of safety belt use do not overlap, the difference in belt use between survey waves was statistically significant. The relative errors for the statewide safety belt use rates were well below the 5 percent maximum required by NHTSA (1.0 percent for the PRE survey and 1.0 percent for the POST survey).

Estimated belt use rates and unweighted numbers of occupants (N) by stratum are also shown in Table 2.

<b>Table 2: Safety Belt Use Rates and Unweighted Ns as a Function of Survey, Stratum, Roadway Type, and Overall Statewide Safety Belt Use</b>				
	<b>PRE (Mini)</b>		<b>POST (Full)</b>	
	<b>Percent Use</b>	<b>N</b>	<b>Percent Use</b>	<b>N</b>
Stratum 1 (High, Intersections)	85.2	790	88.3	1,490
Stratum 2 (Hennepin, Intersections)	92.1	1,143	90.4	2,624
Stratum 3 (Medium, Intersections)	90.4	710	84.3	1,602
Stratum 4 (Low, Intersections)	93.5	671	84.2	1,674
Stratum 5 (High, Exit Ramps)	88.3	827	92.2	787
Stratum 6 (Hennepin, Exit Ramps)	89.4	845	90.5	1,639
Stratum 7 (Medium, Exit Ramps)	87.3	816	87.9	1,725
Stratum 8 (Low, Exit Ramps)	88.5	497	87.1	957
Minnesota, Intersections	91.1	3,314	85.2	7,390
Minnesota, Exit Ramps	88.5	2,985	89.8	5,108
<b>STATE OF MINNESOTA</b>	<b>90.4 ± 1.8</b>	<b>6,299</b>	<b>86.5 ± 1.7</b>	<b>12,498</b>

### **Safety Belt Use by Subcategory (Post, Full Survey Only)**

*Vehicle Type and Stratum.* Estimated belt use rates and unweighted numbers of occupants by stratum and vehicle type are shown in Tables 3a through 3d. Within each vehicle type we find few systematic differences in safety belt use by stratum. However, comparing across vehicle types and strata, we find that safety belt use is lower for pickup truck occupants in nearly all cases. Thus, enforcement and public information and education (PI&E) programs should continue to target pickup truck occupants.

<b>Table 3a. Percent Shoulder Belt Use by Stratum (Passenger Cars)</b>		
	Percent Use	Unweighted N
Stratum 1	90.1	722
Stratum 2	91.1	1,392
Stratum 3	84.0	797
Stratum 4	86.0	791
Stratum 5	93.1	468
Stratum 6	90.2	885
Stratum 7	89.4	833
Stratum 8	88.7	455
STATE OF MINNESOTA	<b>87.4 ± 1.9</b>	6,343

<b>Table 3b. Percent Shoulder Belt Use by Stratum (Sport-Utility Vehicles)</b>		
	Percent Use	Unweighted N
Stratum 1	92.3	341
Stratum 2	92.6	562
Stratum 3	85.4	280
Stratum 4	90.3	257
Stratum 5	93.7	168
Stratum 6	93.0	389
Stratum 7	89.9	302
Stratum 8	91.5	161
STATE OF MINNESOTA	<b>89.8 ± 2.4</b>	2,460

<b>Table 3c. Percent Shoulder Belt Use by Stratum (Vans/Minivans)</b>		
	Percent Use	Unweighted N
Stratum 1	92.8	182
Stratum 2	88.5	321
Stratum 3	95.7	204
Stratum 4	86.0	229
Stratum 5	95.0	79
Stratum 6	93.0	180
Stratum 7	88.8	230
Stratum 8	95.4	111
STATE OF MINNESOTA	<b>91.5 ± 3.0</b>	1,536

<b>Table 3d. Percent Shoulder Belt Use by Stratum (Pickup Trucks)</b>		
	Percent Use	Unweighted N
Stratum 1	74.2	245
Stratum 2	85.2	349
Stratum 3	76.8	321
Stratum 4	74.4	397
Stratum 5	80.3	72
Stratum 6	84.6	185
Stratum 7	82.2	360
Stratum 8	76.3	230
STATE OF MINNESOTA	<b>77.5 ± 2.4</b>	2,159

*Time of Day.* Estimated safety belt use by time of day, vehicle type, and all vehicles combined is shown in Table 4. Note that these data were collected only during daylight hours. For all vehicles combined and for each vehicle type, safety belt use was generally highest during the commuting hours. This finding likely indicates that *Click It or Ticket* enforcement efforts occurred during commuting hours, where the greatest numbers of motorists can be exposed to the increased enforcement.

*Day of Week.* Estimated safety belt use by day of week, vehicle type, and all vehicles combined is shown in Table 4. Note that the survey was conducted over a 2-week period. Belt use clearly varied from day to day, but no systematic differences were evident.

*Weather.* Estimated belt use by prevailing weather conditions, vehicle type, and all vehicles combined is shown in Table 4. A large minority of sites were observed during rainy weather conditions, yet these sites continue to show low use of safety belts, as was been found previously (Eby, Vivoda, & Cavanagh, 2005, 2006, 2007). This finding deserves further investigation. There was essentially no difference in belt use whether it was sunny or cloudy during data collection; a common finding in safety belt research.

*Sex.* Estimated safety belt use by occupant sex, type of vehicle, and all vehicles combined is shown in Table 4. Estimated safety belt use is higher for females than for males for all vehicle types combined and for each separate vehicle type. The greatest discrepancy between men and women belt use was found for occupants of pickup trucks, where a nearly 14 point difference was found.

*Age.* Estimated safety belt use by age, vehicle type, and all vehicle types combined is shown in Table 4. As there were very few 0-to-10-year olds observed in the current study, the estimated safety belt use rate for this age group is not meaningful. Excluding this group, we found that belt use was high for the 11-15-year olds. Belt use rates for the 16-to-29-year-old age group were consistently the lowest, while rates for the 30-to-64-year-old age group are consistently below those of occupants older than 64 years of age. This pattern shows that new drivers and young drivers (16-to-29 years of age) should be a focus of safety belt use messages and programs, as was the appropriate focus of the 2009 Click It or Ticket Campaign.

*Seating Position.* Estimated safety belt use by position in vehicle, vehicle type, and all vehicles combined is shown in Table 4. This table shows that for all vehicle types combined and each vehicle separately, belt use generally did not differ by seating position.

*Age and Sex.* Table 5 shows estimated safety belt use rates and unweighted numbers (N) of occupants for all vehicle types combined by age *and* sex. The belt use rates for the two youngest age groups should be interpreted with caution because the unweighted number of occupants is quite low. Belt use for females in all age groups (except 11-15) was higher than for males. However, the absolute difference in belt use rates between sexes varied depending upon the age group. Excluding the two youngest age groups, the largest difference was found in the 30-to-64-year-old age group, where the estimated belt use rate was 8.9 percentage points higher for females than for males. While this is a large difference, when compared with

previous years (e.g., Eby, Vivoda, & Cavanagh, 2008), the difference between men and women belt use is getting smaller. In addition, the difference between use for young men and women (aged 16-29 years) has decreased by two-thirds when compared to last year. These results argue strongly that statewide efforts directed toward persuading young males to wear their safety belts have been effective.

<b>Table 4. Percent Shoulder Belt Use and Unweighted N by Vehicle Type and Subgroup (Full POST Survey)</b>										
	All Vehicles		Car		SUV		Van/Minivan		Pickup Truck	
	Percent Use	N	Percent Use	N	Percent Use	N	Percent Use	N	Percent Use	N
<u>Overall</u>	86.5	12,498	87.4	6,343	89.8	2,460	91.5	1,536	77.5	2,159
<u>Site Type</u>										
Intersection	85.2	7,390	86.1	3,702	88.8	1,440	90.7	936	76.0	1,312
Exit Ramp	89.8	5,108	90.5	2,641	92.3	1,020	93.3	600	81.1	847
<u>Time of Day</u>										
7 - 9 a.m.	92.4	1,816	93.4	945	92.9	397	91.8	195	87.8	279
9 - 11 a.m.	82.7	2,237	84.5	1,092	89.2	435	78.4	272	77.3	438
11 - 1 p.m.	87.3	2,833	88.5	1,443	87.9	495	89.4	358	81.4	537
1 - 3 p.m.	86.7	2,923	86.9	1,476	89.3	581	95.1	376	76.4	490
3 - 5 p.m.	89.5	2,318	90.8	1,202	91.3	502	94.4	279	75.7	335
5 - 7 p.m.	88.6	371	91.2	185	84.1	50	100	56	83.3	80
<u>Day of Week</u>										
Monday	86.9	1,320	88.7	617	90.6	220	91.7	173	79.2	310
Tuesday	85.8	2,267	85.6	1,133	88.2	423	95.2	283	78.6	428
Wednesday	83.6	884	87.1	385	81.7	168	91.2	135	72.6	196
Thursday	89.7	2,196	92.0	1,117	91.5	510	91.6	240	81.7	329
Friday	82.9	3,151	84.7	1,719	82.3	552	94.3	370	75.6	510
Saturday	86.1	2,001	87.8	1,030	89.2	489	88.2	240	78.3	242
Sunday	86.1	679	86.7	342	90.9	98	89.8	95	79.5	144
<u>Weather</u>										
Sunny	86.2	4,936	87.6	2,544	88.0	963	92.3	591	77.7	838
Cloudy	87.7	5,597	88.5	2,739	90.5	1,078	92.8	722	76.9	1,058
Rainy	68.5	1,965	70.7	1,060	66.7	419	75.2	223	59.7	263
<u>Sex</u>										
Male	83.4	6,917	85.5	3,159	86.7	1,207	90.2	764	75.1	1,787
Female	90.4	5,543	89.3	3,170	92.8	1,242	92.9	766	88.8	365
<u>Age</u>										
0 - 10	95.9	80	96.8	33	100	17	96.0	16	91.0	14
11 - 15	88.5	208	83.9	89	94.8	51	98.0	41	80.1	27
16 - 29	83.9	3,174	85.0	2,105	87.9	464	90.5	205	70.6	400
30 - 64	86.5	7,410	88.6	3,199	89.3	1,690	90.6	1,053	77.5	1,468
65 - Up	90.8	1,603	89.5	906	96.3	232	93.4	218	87.4	247
<u>Position</u>										
Driver	86.6	9,976	88.0	5,086	89.7	1,964	91.3	1,164	77.2	1,762
Passenger	85.9	2,522	85.1	1,257	90.6	496	91.8	372	78.7	397

<b>Table 5. Percent Shoulder Belt Use and Unweighted N by Age and Sex (All Vehicle Types Combined)</b>				
<b>Age Group</b>	<b>Male</b>		<b>Female</b>	
	<b>Percent Use</b>	<b>Unweighted N</b>	<b>Percent Use</b>	<b>Unweighted N</b>
0 - 10	96.8	41	98.1	38
11 - 15	90.0	101	87.6	105
16 - 29	81.2	1,656	87.1	1,514
30 - 64	82.5	4,134	91.4	3,259
65 - Up	89.9	979	92.6	623

## DISCUSSION

The main purpose for conducting this study was to determine the effectiveness of Minnesota's May 2009 *Click It or Ticket* Mobilization campaign by measuring belt use before and after the campaign. Our results showed that statewide safety belt use in Minnesota was significantly lower after the campaign. However, both use rates (90.4% and 86.5%) were higher than the national rate of 83% found in 2008 (NHTSA, 2008). Nevertheless, it is difficult to understand why the statewide belt use rate was *lower* after the enforcement campaign. We believe that this result was most likely due to the implementation of primary enforcement in the middle of the POST survey period. The enactment of a primary enforcement law inevitably leads to media coverage that focuses on the date when the new law goes into effect. This media also reinforces the notion that until the new law goes into effect, law enforcement cannot pull a motorist over for simply violating the mandatory belt law. Such media could result in motorists using belts less often either because the perceived risk of being cited for violating the belt law is reduced or because some motorists are "protesting" the change in the law. In either case, belt use observation would find lower use. Indeed, there is support that belt use drops in the weeks prior to switching to primary enforcement. Eby, Vivoda, and Fordyce (2002) conducted a series of statewide belt use observation surveys when Michigan switched from secondary and primary enforcement. They found that the survey conducted in the month prior to the switch showed a 5 percentage point decrease in statewide belt use when compared to identical surveys conducted 3 months and 16 months prior. A survey conducted during the month following primary enforcement found a 20 percentage point increase. Thus, it is likely that the next survey wave in Minnesota will show the positive effects of switching to primary enforcement.

A secondary purpose of this research was to continue monitoring the progress of Minnesota's efforts to increase safety belt use statewide by examining trends in a full statewide survey. Analysis of safety belt use by the various subgroups showed that there are several areas on which Minnesota should continue to focus efforts to increase safety belt use. One of the lowest use groups discovered was young people. While this group is commonly found to have lower safety belt use than other groups, it is also the group in which the biggest gains in traffic-crash-related-injury reduction can be found. On a per population basis, young drivers in the US had the highest rate of involvement in fatal crashes of any age group in 2001, and their fatality rate based on vehicle miles traveled was four times greater than the comparable rate for drivers age 26 to 65 (NHTSA, 2002). Teenage drivers have by far the highest fatal crash involvement rate of



any age group based on number of licensed drivers. Motor vehicle injury rates also show that teenagers continue to have vastly higher rates than the population in general.

Occupants of pickup trucks also define a unique population that exhibits low safety belt use in Minnesota, and may therefore benefit from specially designed programs. Research has shown that the main demographic differences between the driver/owners of pickup trucks and passenger cars is that driver/owners of pickup trucks are more likely to be male, have higher household incomes, and lower educational levels (Anderson, Winn, & Agran, 1999). Work by the Center for Applied Research (NHTSA, 2004) with rural pickup truck drivers explored why these occupants wear, or do not wear, safety belts. The following reasons were given for nonuse of safety belts: vehicle size protects them from serious injury; safety belt not needed for short or work trips; fear of being trapped in vehicle after a crash; inconsistency between belt law and motorcycle helmet law; and opposition to government mandate. Reasons given for use were: presence of family or friends; travel on interstate highways; travel during inclement weather; and when not traveling in their pickup truck. This information provides a starting point for the development of programs designed to influence pickup truck occupant safety belt use, as efforts to encourage belt use by occupants of pickup trucks are warranted. The Center for Applied Research study also suggests that passage of a mandatory motorcycle helmet use law might also increase belt use among pickup truck drivers (NHTSA, 2004).

We also discovered large, but decreasing, differences in safety belt use between males and females. Understanding why there is a difference in belt use between males and females is very important. In the current survey there is a belt use difference of 7 percentage points between the sexes. According to the Motor Vehicle Occupant Safety Survey, when safety belt non-users and part-time users were asked why they did not wear belts, males and females give different reasons (Block, 2000). Females state "I forgot to put it on" as the most important reason for non-use, while males list "I'm only driving a short distance" as the reason most important to them. An analysis of the types of answers given for non-use by sex revealed that males tend to report reasons that are related to a lower perception of risk (e.g. low probability of a crash or receiving a citation), while more of the answers given by female non-users and part-time users are related to discomfort and forgetting. Traffic safety professionals in Minnesota could use this information for the development of programs aimed at increasing belt use among males.

## REFERENCES

- Anderson, C.L., Winn, D.G., & Agran, P.F. (1999). Differences between pickup truck and automobile driver-owners. *Accident Analysis & Prevention*, **31**, 67-76.
- Block, A.W. (2000). *Motor Vehicle Occupant Safety Survey: Volume 2 Seat Belt Report*. (Report No. DOT HS 809 061). Washington, DC: U.S. Department of Transportation.
- Cochran, W. W. (1977). *Sampling Techniques, 3rd ed.* New York, NY: Wiley.
- Eby, D.W. (2000). *How Often Do People Use Safety Belts in Your Community? A Step-by-Step Guide for Assessing Community Safety Belt Use*. (Report No. UMTRI-2000-19). Ann Arbor, MI: University of Michigan Transportation Research Institute.
- Eby, D.W., Vivoda, J.M., & Cavanagh, J. (2005). *An Evaluation of the May 2005 Click It or Ticket Safety Belt Mobilization Campaign in Minnesota*. St Paul, MN: Minnesota Office of Traffic Safety.
- Eby, D.W., Vivoda, J.M., & Cavanagh, J. (2006). *An Evaluation of the May 2006 Click It or Ticket Safety Belt Mobilization Campaign in Minnesota*. St Paul, MN: Minnesota Office of Traffic Safety.
- Eby, D.W., Vivoda, J.M., & Cavanagh, J. (2007). *An Evaluation of the May 2007 Click It or Ticket Safety Belt Mobilization Campaign in Minnesota*. St Paul, MN: Minnesota Office of Traffic Safety.
- Eby, D.W., Vivoda, J.M., & Cavanagh, J. (2008). *An Evaluation of the May 2008 Click It or Ticket Safety Belt Mobilization Campaign in Minnesota*. St Paul, MN: Minnesota Office of Traffic Safety.
- Eby, D.W., Vivoda, J.M., & Fordyce, T.A. (2002). The effects of standard enforcement on Michigan safety belt use. *Accident Analysis & Prevention*, **34**, 815-825.
- Federal Highway Administration (2002). *Highway Statistics 2001*. Washington, DC: US Department of Transportation.
- Governors Highway Safety Association (2008). *Click It or Ticket: 2008 National Mobilization*. URL: <http://www.ghsa.org/html/projects/CIOT/08.html>.
- Minnesota Office of Traffic Safety (2009). 2009 "Click It or Ticket" May Mobilization Home Page. URL: [http://www.dps.state.mn.us/ots/enforcement\\_programs/MayMob2009/default\\_May.asp](http://www.dps.state.mn.us/ots/enforcement_programs/MayMob2009/default_May.asp). Accessed July 25, 2009.
- National Highway Traffic Safety Administration. (1992). Guidelines for State Observational Surveys of Safety Belt and Motorcycle Helmet Use. *Federal Register*, **57**(125), 28899-28904.

- National Highway Traffic Safety Administration (1998). *Uniform Criteria for State Observational Surveys of Seat Belt Use*. (Docket No. NHTSA-98-4280). Washington, DC: US Department of Transportation.
- National Highway Traffic Safety Administration (2002). *Traffic Safety Facts 2000*. (Report No. DOT-HS-809-328). Washington, D.C.: US Department of Transportation.
- National Highway Traffic Safety Administration. (2004). Safety belt attitudes among rural pickup truck drivers. *Traffic Safety Facts, Traffic Tech—Technology Transfer Series. No. 291*. Washington, DC: U.S. Department of Transportation.
- National Highway Traffic Safety Administration (2007). National Communications Plan 2007. Washington, DC: US Department of Transportation. URL: [http://trafficsafetymarketing.gov/Resources/CommPlans/NHTS\\_Plan07.PDF](http://trafficsafetymarketing.gov/Resources/CommPlans/NHTS_Plan07.PDF)
- National Highway Traffic Safety Administration (2008). *Seat Belt Use in 2008—Overall Results*. (Report No. DOT-HS-811-036). Washington, D.C.: US Department of Transportation.
- Solomon, M.G., Chaudhary, N.K., & Cosgrove, L.A. (2003). *May 2003 Click It or Ticket Safety Belt Mobilization Evaluation*. Washington, DC: US Department of Transportation.
- Solomon, M.G., Ulmer, R.G., & Preusser, D.F. (2002). *Evaluation of Click It or Ticket Model Programs*. (Report No. DOT-HS-809-498). Washington, DC: US Department of Transportation.
- US Census Bureau. (2003). *Census 2000 Gateway*. Retrieved June 25, 2003.

## **APPENDIX A: PDA Data Collection Details**

In the current study all data collection was conducted using Personal Digital Assistants (PDAs). The transition from paper to PDA data collection was made primarily to decrease the time necessary to move from the end of the data collection phase of a survey to data analysis. With paper data, there is automatically two to three weeks of additional time built-in while the paper data are being entered into an electronic format. Before making this transition, a pilot study was conducted to compare data collection by PDA to paper. Several key factors were tested during the pilot study including accuracy, volume (speed), ease of use, mechanical issues (i.e. battery life), and environmental issues (i.e. weather, daylight). The pilot study found PDA use to be equal to, or better than paper data collection on every factor tested. Before making the change to PDA data collection, electronic versions of the *Site Description Form* and *Observation Form* were developed (these have since been combined into a single electronic form). The following pages show examples of the electronic form and discuss other factors related to using PDAs for safety belt data collection.

The goal of adapting the existing paper forms to an electronic format was to create electronic forms that were very similar to the paper forms, while taking advantage of the advanced, built-in capabilities of the PDA. As such, the electronic data collection form incorporated a built-in traffic counter, used the PDA's calendar function for date entry, and included high resolution color on the screens. The site description form portion of the data collection form is divided into five screens. The first screen (Figure 2) allows users to type in the site location (street names and standing location). Observers use the PDA stylus to tap on the appropriate choices of site type, site choice, and traffic control. If a mistake is made, the observer can change the data they have input, simply by tapping on the correct choice. All selected choices appear highlighted on the screen.

Site #: 208 Save

**Site Location:**  
WB CR 149 & County Route 48

**Site Type:** Intersection

**Exit #:** Freeway ↓

**Site Choice:** Primary

Alternate ↓

**Traffic Control:** Traffic Light

Stop sign

None

Other ↓

Previous Page Cancel Next Page

Figure 2: Site Description Form – Screen 1.

Screens 2 and 3 are shown in Figure 3. As seen in this figure, observers enter their observer number, the weather, day of week, and median information, simply by tapping the appropriate choice on the display list. Screen 3 allows users to sketch in the intersection and show where they are standing, and to record the start time for the site.

The figure consists of two side-by-side screenshots of a PDA interface for site description.

**Left Screenshot (Screen 2):**

- Previous Page** (button)
- Date (MMDD):** 0619
- Observer:**
  - Observer 1
  - Observer 2
  - Observer 3** (highlighted)
  - Observer 4
  - Observer 5 ↓
- Weather:**
  - Mostly Sunny** (highlighted)
  - Mostly Cloudy
  - Rain
  - Snow ↓
- Day of Week:**
  - Monday** (highlighted)
  - Tuesday
  - Wednesday
  - Thursday
  - Friday
  - Saturday
  - Sunday ↓
- Median:**
  - Yes
  - No** ↓
- Next Page** (button)


**Right Screenshot (Screen 3):**

- Previous Page** (button)
- Draw your site below** (text)
- ↑ N (North arrow)
- Hand-drawn sketch of an intersection with a vertical road and a horizontal road. A vertical line with a crossbar and a horizontal line with a crossbar are drawn. A handwritten 'X' is on the horizontal line. The text 'CR 149' is written on the horizontal line.
- Start Time (24 hr clock - HHMM):** 0800
- Count 1** (display)

**Figure 3: Site Description Form - Screens 2 and 3**


In the past, observers had to put away their paper form, get out a mechanical traffic counter, and begin a traffic count after entering the start time. Using a PDA, it is possible to incorporate a traffic counter directly into the site description portion of the data collection form<sup>1</sup>. Figure 4 shows an example of the electronic traffic counter (Screen 4). To count each vehicle that passes, observers tap on the large "+" button. The size of this button allows the observer to tap the screen while keeping their eyes on the roadway. Each tap increases the count that is displayed at the top of the screen. If a mistake is made, the observer can decrease the count by tapping on the small "-" button on the left of the screen.

<sup>1</sup>The PDA traffic counting method was compared with a mechanical counter during the pilot testing and no difference was found between the two methods.

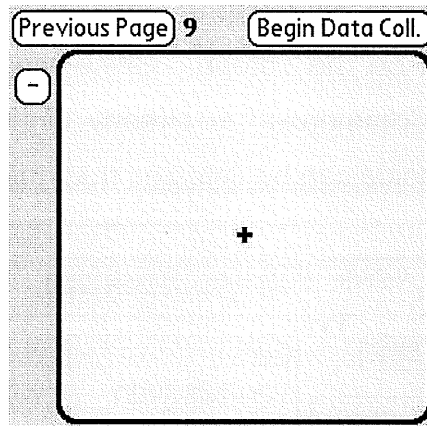

**Figure 4: Site Description Form – Screen 4**

The last screen of the electronic *Site Description Form*, shown in Figure 5, allows the user to enter the end time of the site observation and interruption (if any). Finally, observers can type in any comments regarding the site or traffic flow that may be important.

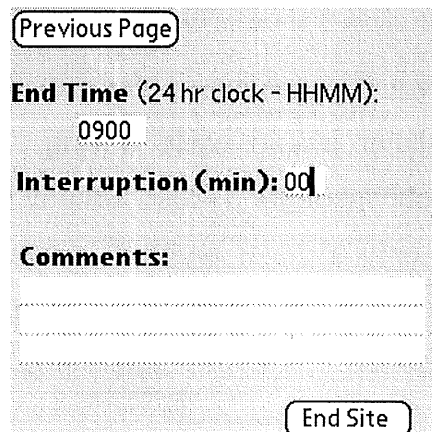

**Figure 5: Site Description Form - Screen 5**

To allow for easier data entry, the observation portion of the electronic data collection form was divided into three screens, one for vehicle information, one for driver information, and one for front-right passenger information. As shown in Figure 6, each screen is accessible by tapping on the appropriate tab along the top of the screen. The screens have also been designed with different colors, with the vehicle screen yellow, driver screen blue, and passenger screen green. As shown below, the first screen that

appears in the form is the vehicle screen. Each category of data, along with the choices for each category, are displayed on the screen. As in the Site Description Form, users simply tap on the choices that correspond to the motorist that is being observed. These data then appear highlighted on the screen. Since most vehicles are not used for commercial purposes, "Not Commercial" is already highlighted as a default. If the vehicle is commercial, that choice can be selected from the list.

**Figure 6: Observation Form - Vehicle Screen**

Figure 7 shows the driver and passenger screens. Because most motorists are not actively talking on a cellular phone while driving, "No Cell Phone" is already highlighted as the default. "No Passenger" is also already marked as the default choice because most vehicles have only a driver present. Once data are complete for one vehicle, observers tap the "Next Vehicle" button to continue collecting data.

**Figure 7: Observation Form - Passenger and Vehicle Screens**



Each PDA also had a built-in cellular phone as well as wireless e-mail capability. At regular intervals, observers e-mailed completed data directly from the PDA to the project supervisor. Data collection forms from completed sites were "zipped," using a compression program, and then transmitted directly to a pre-determined e-mail account. The e-mailing of data allowed the field supervisor to immediately check data for errors, and begin to compile a data analysis file as the project progressed.

## **APPENDIX B: Site Listing**

## Survey Sites By Number

No.	County	Site Location
001	Dakota	EB 135th St/Co. Rd. 38 & Blaine Ave/County Rout 71/Rich Valley Blvd
002	Olmsted	EB CR 112/County Route 12 & CR 112
003	Carver	EB 150th St/County Route 50 & County Route 41
004	Carver	EB 70th St/County Route 30 & State Route 25/Ash
005	Carver	NB Yancy Ave & State Route 7
006	Carver	SB Little Ave & 102nd St
007	Dakota	EB W 136th St & Nicollet Ave
008	Wright	WB CR 123 & County Route 7/CR 106
009	Olmsted	EB CR 120 & County Route 20
010	Wright	EB CR 118/CR18/50th St. & County Route 35/Main St.
*011	Dakota	NB CR 21/Guam Ave & 307th St/CR 90
012	Wright	EB 14th St/CR 112 & State Route 25
013	Dakota	EB 240th St West & Cedar Ave/County Route 23
*014	Dakota	NB Johnny Cake Ridge Rd & Coutny Route 32/Cliff Rd
015	Olmsted	SB County Route 3 & County Route 4
*016	Olmsted	EB CR 137 & CR 136
017	Dakota	EB 80th St & Concord Blvd/County Route 56
018	Dakota	EB 220th St East & Nicolai/County Route 91
019	Dakota	SB Fairgreen Ave & 280th St West/County Route 86
020	Wright	NB County Route 12 & County Route 37
021	Olmsted	WB County Route 9 & County Route 10
*022	Dakota	EB Wescott Rd & Lexington Ave
023	Dakota	NB Hogan Ave/County Route 85 & 220th St East
*024	Wright	SB US 12/County Route 16 & Babcock Blvd/County Route 30
025	Wright	EB County Route 38/Harrison St. (Near Oak St/CR 24) & State Route 55/State Route 24
026	Dakota	NB Blaine Ave/CR 79 & 245th St East/County Route 80
*027	Olmsted	SB CR 119 & County Route 9
*028	Dakota	EB County Route 88/290th Street East & Northfield Blvd/County Route 47
*029	Ramsey	NB Hodgson Rd/County Route 49 & Turtle/County Route 3/CR 1
030	Carver	SB Yale Ave/Yancy Ave & County Route 30
031	Olmsted	NB CR 125/Maywood Rd. SW & County Route 25/Salem Rd. SW
032	Olmsted	EB CR 154/85th St. NW & US 52
*033	Wright	SB County Route 12 & State Route 55
*034	Carver	WB 62nd St & County Route 33
*035	Ramsey	EB Minnehaha Ave/State Route 5 & White Bear Ave/County Route 65
*036	Olmsted	SB CR 128 & State Route 247/County Route 12
037	Dakota	SB CR 51/County Route 80/Biscayne Ave & 280th St West/County Route 86
*038	Olmsted	NB CR 132/County Route 32 & County Route 9
039	Dakota	SB Inga Ave & State Route 50/240th St East
*040	Dakota	EB County Route 14/Grand Ave. & Concord St/State Route 156
041	Dakota	NB Goodwin Ave & State Route 55
042	Ramsey	NB Rice St & Maryland Ave
043	Dakota	SB Emery Ave & 190th St East/County Route 62
044	Ramsey	NBP I-35 W & Old Hwy 8/Anoka Cutoff (Exit 26)
*045	Ramsey	NBD I-35 E & County Route 23 (Exit 112)
046	Olmsted	WBP I-90 & County Route 10 (Exit 229)
*047	Dakota	SBD I-35 & County Route 50/County Route 5(Exit 85)
048	Ramsey	WBP State Route 36 & Hamline Ave
*049	Dakota	SBD US-52 & Thompson Ave
*050	Ramsey	SBD I-35 E & St. Clair
*051	Dakota	WBD I-494 & Robert St (Exit 67)
052	Dakota	NBD I-35 E & State Route 110/Mendota Rd (Exit 101)
*053	Olmsted	EBD I-90 & State Route 42 (Exit 224)
054	Ramsey	SBD I-35 E & Randolph Ave
055	Ramsey	EBD State Route 36 & Lexington Ave/County Route 51
056	Ramsey	EBD US-12/US-52/I-94 & S. Cretin Ave
057	Ramsey	NBP County Route 280 & Energy Park Dr
058	Dakota	SBD US-52/Lafayette Frwy & Butler Ave
059	Ramsey	EBP I-694 & US-61/Maplewood Dr (Exit 48)
060	Ramsey	EBD US-12/US-52/I-94 & Lexington Parkway/County Route 51
061	Hennepin	SB Pineview Ave & 129th Ave

062	Hennepin	WB Olson Memorial Hwy/State Route 55 & County Route 102/Douglas Drive
*063	Hennepin	NB Mohawk Dr & Horseshoe Tr
064	Hennepin	SB County Route 60/Mitchell Rd & State Route 5
065	Hennepin	WB Gleason Lake Rd/County Route 15 & Vicksburg Lane
066	Hennepin	NEB State Route 7 & Chanhassen Rd/State Route 101
067	Hennepin	NB Brown Rd/County Route 146 & Watertown Rd
*068	Hennepin	NB Commerce Blvd & West Branch Rd/County Route 151
069	Hennepin	NB Chanhassen Rd/State Route 101 & Minnetonka Blvd/County Route 5
070	Hennepin	SB County Route 44 & Bartlett Blvd/County Route 110
071	Hennepin	SB Tucker Rd & County Route 116/CR 159/Territorial Rd.
*072	Hennepin	NEB Old Shakopee Rd/County Route 1 & Penn Ave.
073	Hennepin	NWB County Route 81 & 77th Ave North/County Route 152/Brooklyn Blvd.
*074	Hennepin	NB Belchtold Rd & 109th Ave North/County Route 117
075	Hennepin	NB County Route 34/Normandale Blvd & Old Shakopee Rd/County Route 1
*076	Hennepin	NB Penn Ave/County Route 2 & Olson Memorial Highway/State Route 55
077	Hennepin	WB Elm Creek Rd & Fernbrooke Ave/County Route 121
078	Hennepin	NB Pioneer Tr/County Route 113 & Woodland Tr/County Route 10
079	Hennepin	WB Rockford Rd/County Route 9 & Medicine Lake Dr/Larch Lane
*080	Hennepin	SB Lyndale Ave & West 50th St/County Route 21
081	Hennepin	NB Willow Dr & County Route 24
*082	Hennepin	WB 125th Ave North & Zanzibar Lane
083	Hennepin	SB Lyndale Ave & West 82nd St
084	Hennepin	NB Broadway Ave/CR 103/County Route 130 & 85th Ave North/County Route 109
*085	Hennepin	NB Mendelssohn Ave & 63rd Ave
*086	Hennepin	WB N 121st Ave & Fernbrooke/County Route 121
*087	Hennepin	WB Cedar Lake Rd/County Route 16 & Plymouth Rd/County Route 61
088	Hennepin	EB Nike Rd & Main Street/County Route 92
089	Hennepin	NWB N Nobel Ave & 109th Ave
*090	Hennepin	SB Mohawk Dr & State Route 55
*091	Hennepin	NB County Route 32 & West 82nd Street
092	Hennepin	WB County Route 109/85th Ave N & Country Route 158/Rice Lake Rd.
093	Hennepin	SB Country Route 101 & County Route 42/Wayzata Blvd.
094	Hennepin	NB University Ave & County Route 23
*095	Hennepin	SB Country Route 116/Fletcher Lane & County Route 30/97th Ave N
096	Hennepin	EB County Route 53/66th St. & State Route 77
097	Hennepin	NB Winnetka Ave/County Route 156 & Medicine Lake Rd
098	Hennepin	SB Goose Lake Rd & Elm Creek Rd
*099	Hennepin	WB Medicine Lake Rd/26th St. & Medicine Lake Blvd
100	Hennepin	NB Budd Ave & Pagenkoph Rd
*101	Hennepin	EB Duck Lake Tr & Eden Prarie Rd/County Route 4
102	Hennepin	NB Eden Prarie Rd/County Route 4 & Excelsior Blvd/County Route 3
103	Hennepin	SEB County Route 152/Osseo Rd. & N. Penn/44th Ave.
104	Hennepin	SBD State Route 77 & County Route 1/Old Shakopee Rd
*105	Hennepin	NBD I-35 W & W 82nd St (Exit 8)
106	Hennepin	WBP State Route 62/Crosstown Hwy & Gleason
*107	Hennepin	SBD I-494 & County Route 10/Bass Lake Rd (Exit 26)
*108	Hennepin	WBP I-94/US-12/US-52 & S 25th Ave.
*109	Hennepin	NBP I-35 W & W 35th St/E 35th St
110	Hennepin	WBP I-94/US-52 & County Route 30/Dunkirk Lane (Exit 213)
111	Hennepin	SBD I-35 W & W 66th St/E 66th St
112	Hennepin	NBP US-169 & 36th Ave N
*113	Hennepin	EBP I-494 & Townline Rd/US-169
114	Hennepin	N/WBD I-494 & State Route 55/Olson Memorial Hwy
115	Hennepin	WBP State Route 62/Crosstown Hwy & Tracy Ave
116	Hennepin	SBP State Route 100 & Minnetonka Blvd/County Route 5/Vernon
117	Hennepin	SBP State Route 100 & W 50th St/County Route 21/County Route 158
*118	Hennepin	EBD State Route 62 & Portland Ave South
119	Hennepin	NBP US-169 & Valley View Rd
120	Hennepin	NBD US-169 & Plymouth Ave/13th Ave N
121	Sherburne	NB County Route 73/127th St./County Route 48 & CR 73/185th Ave.
122	St. Louis	WB State Route 135/County Route 102 & US 53/State Route 169
123	St. Louis	WB CR 791 & County Route 25
124	Rice	SB Culver Ave & 150th Street W/County Route 9
125	Beltrami	SB State Route 72/County Route 36 & County Route 41
*126	Washington	NB Manning & 70th St. S

127	Clay	EB State Route 34 & County Route 25
128	Kandiyohi	WB 255th Ave Northeast & County Route 9
129	St. Louis	EB County Route 16/CR 957 & US 53
130	Kandiyohi	EB CR 107/240th Ave. & 40th Street NE
131	Kandiyohi	WB 105 Ave SE & CR 136/165th St SE
132	Blue Earth	WB County Route 29/State Route 30 & State Route 22/State Route 30
133	Freeborn	NB US-69 & County Route 46
134	Clay	EB CR 105 & County Route 13/County Route 73/90th St. N
*135	St. Louis	WB State Route 194/Central Entrance & County Route 90/Arlington
136	Steele	SB County Route 3 & State Route 30
137	Blue Earth	WB County Route 13/County Route 38 & US-169
*138	Sherburne	SB US 169 & County Route 4
*139	Sherburne	EB CR 54/77th St. SE & State Route 25/125th Ave. SE
140	Freeborn	EB CR 115/County Route 23 & County Route 26
*141	Blue Earth	WB CR 167 & County Route 39
142	Sherburne	NWB US 10 & County Route 15
*143	St. Louis	EB State Route 194 & US 53
144	Freeborn	NB County Route 24/County Route 45/Independence Ave & County Route 31/CR 116/Main St.
*145	Goodhue	SB County Route 1 & State Route 60
*146	Freeborn	EB County Route 9/CR 78 & US 69
147	Blue Earth	NB County Route 30/CR 107 & County Route 22/CR 108
148	St. Louis	EB County Route 28/Sax Road & County Route 7
149	Nicollet	EB County Route 15/382nd St. & State Route 15
150	Blue Earth	EB Madison Ave/State Route 22 & State Route 22
*151	Steele	SB 7th Ave NE & County Route 8/Mineral Springs Rd.
152	Blue Earth	EB County Route 25/CR 138 & County Route 20
*153	Blue Earth	NB County Route 14/CR 173 & State Route 83
154	St. Louis	EB County Route 12/Roberg Rd & Lakewood Rd/CR 692
*155	Crow Wing	NB County Route 25/CR 144 & State Route 18
*156	Kandiyohi	WB 60th Ave SW & County Route 7/135th St.
*157	Scott	EB County Route 2/CR 54 & State Route 13/Langford Ave
*158	Blue Earth	SB State Route 60 & US 14/State Route 60
159	Goodhue	SB County Route 4 & County Route 10
160	Kandiyohi	SB CR 127/60th St. NE & County Route 26/60th Ave.
*161	Clay	EB 90th Ave./County Route 10 & 70th St./County Route 11/State Route 336
162	Nicollet	NB County Route 7/585TH St. & County Route 1/350th St.
163	Scott	EB CR 64/230th St W & State Route 21/Helena Blvd
164	Steele	SBD I-35 & County Route 4 (Exit 32)
165	St. Louis	SBP I-35 & US-53/Piedmont Ave
166	Freeborn	SBP I-35 & County Route 35 (Exit 22)
167	Clay	EBP I-94 & County Route 10 (Exit 15)
168	Washington	N/WBP I-694 & 10th St/County Route 10 (Exit 57)
*169	Clay	WBP I-94 & County Route 52 (Exit 2)
170	Rice	SBP I-35 & State Route 60 (Exit 56)
171	Steele	NBD I-35 & County Route 12 (Exit 48)
*172	Beltrami	EBP US-2/US-71 & US-71
173	Freeborn	EBD I-90 & State Route 13 (Exit 154)
174	Freeborn	SBD I-35 & State Route 251 (Exit 18)
*175	St. Louis	SBP I-35 & S 27th Ave. W (Exit 254)
*176	Washington	SBP I-35 & Central Ave. (Exit 252)
177	St. Louis	N/EBD I-35 & 46th Ave
178	Freeborn	NBD I-35 & County Route 46 ? (Exit 11)
*179	Washington	NBP US-10/US-61 & 80th St/Grange Blvd
*180	St. Louis	N/EBD I-35 & Skyline Pkwy/Boundary Dr. (Exit 249)
*181	Morrison	SB CR 264/205th Ave. & County Route 46/183rd St.
182	Douglas	SB County Route 6 & County Route 22
*183	McLeod	WB County Route 26/100th St. & State Route 15
184	Morrison	SB County Route 37 & County Route 26/Nature Rd.
185	Polk	NB County Route 63 & US-2
*186	Cass	WB County Route 29/CR 107/76th St. & County Route 1
*187	Becker	SB Little Toad Lake Rd/County Route 31 & State Route 87
188	Otter Tail	EB County Route 10 & US 59
189	Otter Tail	EB County Route 60/State Route 228 & US 10
190	Cass	WB County Route 34 & State Route 64

191	Brown	EB County Route 22/CR 102 & County Route 13
192	Morrison	SB County Route 6/90th Ave. & County Route 1/State Route 238
193	Mower	WB 115th St. & County Route 14/770th Ave.
194	Stearns	WB CR 146 & State Route 15
195	Cass	EB County Route 43/Twp 4/12th St. & State Route 84/County Route 44
*196	Polk	NB County Route 54 & County Route 11
197	Polk	EB CR 213 & CR 213/County Route 48
198	Winona	NEB County Route 44/Huff St. & US 14/US 61
*199	Morrison	EB CR 203/County Route 1 & County Route 2
200	Stearns	SB US 71 & State Route 55
*201	Douglas	EB State Route 27 & State Route 29
*202	Winona	WB County Route 22 extension (unmarked gravel road North of County Route 115) & County Route 37
*203	Anoka	SB CR 67 & County Route 22
204	Cass	EB County Route 66/122nd St. & State Route 371
*205	Benton	WB County Route 12/Pine Rd. & State Route 25
206	Becker	SB County Route 49/CR 119 & State Route 87
*207	Polk	NB County Route 65 & US-75
208	Stearns	WB CR 149 & County Route 48
209	Isanti	SB State Route 47 & County Route 8
210	Otter Tail	EB County Route 6 & County Route 59
*211	Stearns	WB Division St/County Route 75 & State Route 15
212	Itasca	EB US 2/4th St. & State Route 38/3rd Ave.
213	McLeod	SB County Route 25/CR 52/5th Ave. S. & US 212
214	Mower	EB County Route 1 & US 218
215	Benton	SB County Route 6 & County Route 4
216	Brown	WB 150th St./CR100 & County Route 2
*217	Anoka	SB County Route 5/CR 56 & Northern Blvd/County Route 5
218	Douglas	NB County Route 40 & County Route 82
219	Douglas	WB County Route 10 & County Route 3
*220	Winona	NEB County Route 7 & US 14/US 61
221	Stearns	SEB County Route 152 & County Route 10
222	Stearns	WB County Route 75 & County Route 2
223	Isanti	NB County Route 7/CR 57 & State Route 95
224	Carlton	SWBP I-35 & State Route 45 (Exit 239)
*225	Anoka	SBP I-35 W & County Route 23/Lake Dr (Exit 36)
226	Stearns	WBD I-94/US-52 & CR 159 (Exit 156)
227	Winona	EBD I-90 & State Route 43 (Exit 249)
228	Stearns	EBP I-94 & State Route 23 (Exit 164)
*229	Anoka	EBP US-10 & State Route 65
*230	Chisago	SBD I-35 & County Route 10 (Exit 152)
231	Mower	WBP I-90 & State Route 56 (Exit 183)
232	Stearns	EBP I-94 & County Route 7 (Exit 171)
*233	Winona	WBP I-90 & State Route 76 (Exit 257)
*234	Otter Tail	W/NBP I-94 & US-59/County Route 52/County Route 88 (Exit 50)
235	Anoka	WBP US-10/State Route 610 & State Route 47
236	Douglas	EBD I-94 & State Route 79 (Exit 82)
237	Stearns	WBP I-94 & County Route 9 (Exit 153)
238	Stearns	WBD I-94 & County Route 11 (Exit 137)
239	Carlton	EBD I-35 & State Route 61 (Exit 245)
*240	Douglas	EBP I-94 & State Route 29 (Exit 103)

\* indicates a site used in the mini survey.